

DS-KD-KK

Video Intercom Nametag Module



The DS-KD-KK Video Intercom Nametag Module can be installed with DS-KD8003-IME1 Video Intercom Module Door Station and other Hikvision video intercom module products.

It features six physical buttons and nametags, which can be retrofitted with resident information and allow for direct dialing.

Available Models:


DS-KD-KK

- One-Touch Resident Dialing
- Backlight Compensation
- Aviation-Grade Aluminum Cover and Installation Frame

Specifications

DS-KD-KK	
System Parameters	
Processor	Embedded MCU processor
Operation Method	Physical button
Interfaces	
Module-Connecting	2 (1 input, 1 output)
Debug	1
General	
Physical Button	6
DIP Switch	8
Power Supply	Powered by DS-DS-KD8003-IME1
Power Consumption	≤2 W
Working Temperature	-40° F to 140° F (-40° C to 60° C)
Working Humidity	10% to 95%
IP Protection Level	IP65
Installation	Flush and surface mounts
Dimensions (L x W x H)	3.87" x 3.95" x 1.33" (98.21 mm x 100.21 mm x 33.7 mm)

Appearance and Interface

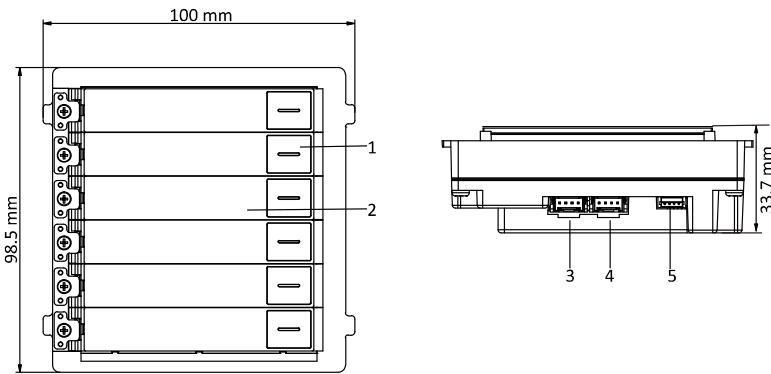

Number	Description
1	Call Button
2	Nametag
3	Output
4	Input
5	Debug

Typical Application

