

## DS-KD-KP Keypad Module



The DS-KD-KP Keypad Module can be installed with the DS-KD8003-IME1 Video Intercom Module Door Station and other Hikvision video intercom module products.

It features twelve physical buttons, which can be used to unlock doors via passcodes or dial resident room numbers directly.

### Available Models:


DS-KD-KP

- Door Unlocking Via Entered Password
- Resident Calling Via Entered Room Number
- Backlight Compensation

## Specifications

DS-KD-KP	
<b>System Parameters</b>	
Processor	Embedded MCU processor
Operation Method	Physical button
<b>Interfaces</b>	
Module-Connecting	2 (1 input, 1 output)
Debug	1
<b>General</b>	
Physical Button	12
DIP Switch	8
Power Input	12 VDC (powered by another module)
Power Output	12 VDC (power for another module)
Power Consumption	≤2 W
Working Temperature	-40° F to 140° F (-40° C to 60° C)
Working Humidity	10% to 95%
IP Protection Level	IP65, IK7
Installation	Flush and surface mounts
Dimensions (L x W x H)	3.87" x 3.95" x 1.33" (98.5 mm x 100 mm x 34.2 mm)

# Appearance and Interface

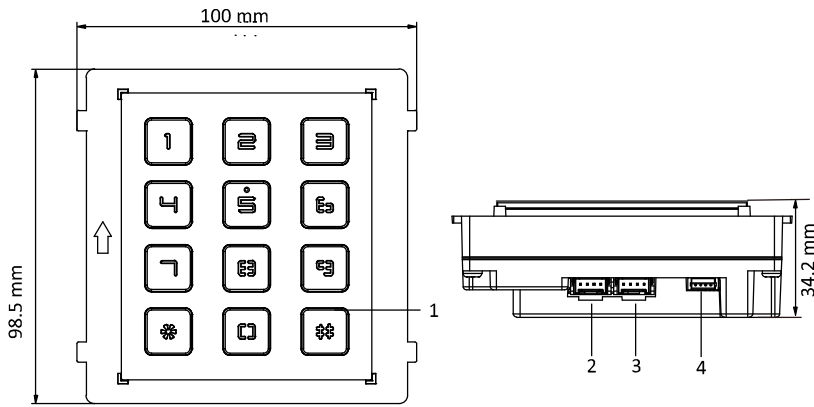

Number	Description
1	Button
2	Output
3	Input
4	Debug Port

# Typical Application

