

CPM-S-G Ceiling Mount for Speed Dome



- Aluminum Alloy with Surface Spray Treatment
- Safety Rope Facilitates Speed Dome Installation


The mount must be installed on a flat wall. Waterproof rubber is necessary for outdoor application. The wall must be capable of supporting at least three times as much as the total weight of the camera and the mount. The mount's maximum load capacity is 22 lbs (10 kg).

Available models: CPM-S-G

Specifications

	CPM-S-G
Camera	
Appearance	Platinum Gray
	Aluminum Alloy
Dimension	4.59" × 2.24" (116.5 mm x 57 mm)
Weight	0.84 lbs (0.38 kg)

Dimensions

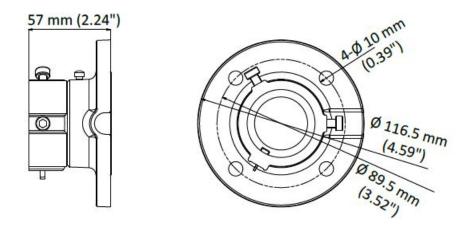

© 2018-2019 Hikvision USA Inc. • All Rights Reserved • Specifications subject to change without notice. Hikvision USA Inc., 18639 Railroad Street, City of Industry, CA 91748, USA • Hikvision Canada, 4848 rue Levy, St-Laurent, Quebec, Canada, H4R 2P1 Tel: +1-909-895-0400 • Toll Free in USA: +1-866-200-6690 • E-Mail: sales.usa@hikvision.com • www.hikvision.com

