

DS-D5032FC-A 32" LCD Display Monitor



Hikvision's DS-D5032FC-A 32-inch LCD Display Monitor provides excellent color rendition and enhanced, 1920 x 1080 resolution. Spread-Spectrum technology reduces EMI radiation, and standby mode w/no signal input along with the ability to set the sleep time make this monitor green energy friendly.

The DS-D5032FC-A is constructed of high-quality components and materials for 24/7 use.


Available Models:
DS-D5032FC-A

- 3-D Digital Comb Filter
- True Color OSD and User-Friendly Menu
- 1 Channel HDMI 1.4 Input Interface, HDCP
- 3D Noise Reduction Technology
- Programmable 12-bit RGB Gamma Correction
- Mstar ACE-5 Auto Color and Image Enhancement Engine, Improved Image Contrast, Detail, and Edge
- Spread-Spectrum Technology Reduces EMI Radiation
- Highly Reliable Component for 24/7 Work
- Green Energy: Standby Mode w/No Signal Input, Set Sleep Time


Specifications

DS-D5032FC-A		
Display Type	TFT-LED backlight	
Screen Size	31.5"	
Dot Pitch (H×V)	0.12125 mm x 0.36375 mm	
Resolution	1920 x 1080	
Brightness	300 cd/m ²	
Contrast	1000 : 1	
Response Time	8 ms	
Color	16.7 M	
Viewable Area (H×V)	698.40 mm x 392.85 mm	
Viewing Angle	Horizontal 178°, vertical 178°	
Interfaces	DVI Input	1
	VGA Input	1
	HDMI Input	1
	BNC Input	1
	BNC Output	1
	USB	1
	PC AUDIO-IN	1, 3.5 mm mini-jack
	PC AUDIO-OUT	1, 3.5 mm mini-jack
Speaker	2 W x 2, 6Ω	
VESA	100 mm x 100 mm	
Power Supply	100 to 240 VAC, 50/60 Hz	
Power Consumption	≤45 W	
Operating Temperature	0° to 40° C	
Operating Humidity	10% to 85% (no condensation)	
Storage Temperature	-20° to 60° C	
Bezel Material	Plastic	
Dimensions (W×H×D)	728.8 mm x 526 mm x 167.2 mm	
Package Dimensions (W×H×D)	803 mm x 513 mm x 197 mm	
Weight	9.25 kg (gross weight), 5.75 kg (net weight)	
Included Accessories	Power cord x 1, VGA cable x 1, HDMI x 1, remote control x 1, battery x 2, user manual x 1, warranty card x 1, base bracket x 1	

Interfaces

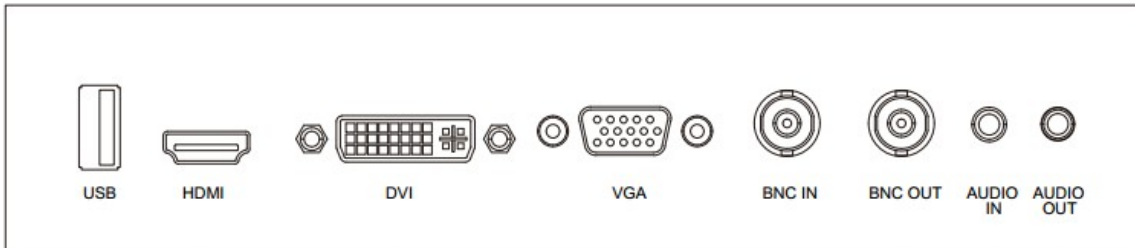

Accessories



Dimensions

