


DS-D5040FC

40" LCD Display Monitor

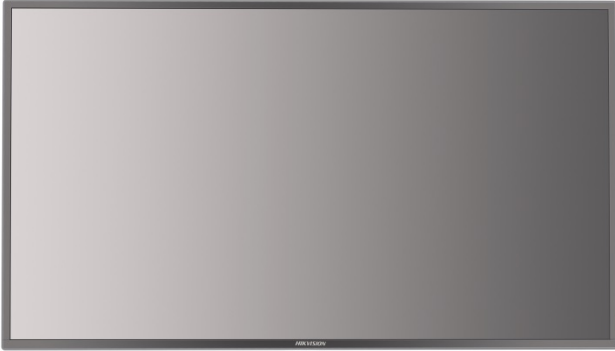

Hikvision's DS-D5040FC 40-inch LCD monitor provides excellent color rendition and enhanced, 1080p resolution. It features an LED direct-lit backlight with uniform brightness and no boundary shadow.

The DS-D5040FC is constructed of high-quality components and materials for 24/7 use.


Available Models:
DS-D5040FC

- 1080p Resolution
- 8/10 Bit HD Display
- 3D Comb Filter
- 3D Noise Reduction
- 1-ch HDMI 1.4 Input Interface, Supports HDCP
- High-Definition JPEG Decoding
- 12-Bit RGB Gamma Correction Technology
- Spread Spectrum Technology Reduces EMI Radiation
- Mstar ACE-5 Auto Color and Image Enhancement
- Highly Reliable 24h/Day Functioning

Specifications

DS-D5040FC	
Display Type	TFT-LED Backlit TFT LCD
Screen Size	39.5"
Pixel Pitch (H x V)	0.15245 mm x 0.04494 mm
Maximum Resolution	1920 x 1080
Brightness	360 cd/m ² (typical)
Contrast	5000:1
Response Time	9.5 ms
Color	16.7 M
Viewable Area (H x V)	34.57" x 19.11" (878.11 mm x 485.35 mm)
Viewing Angle	Horizontal 178°, vertical 178°
Interfaces	
VGA Input	1
HDMI Input	1
DVI Input	1
USB	1
BNC Input	1
BNC Output	1
PC Audio-In	1, 3.5 mm mini-jack
PC Audio-Out	1, 3.5 mm mini-jack
Audio	
Speaker	2 W x 2
General	
Power Supply	100 to 240 VAC
Consumption	< 60
Operating Temperature	32° F to 104° F (0° C to 40° C)
Operating Humidity	10% to 85% (no condensation)
Storage Temperature	-4° F to 131° F (-20° C to 55° C)
Storage Humidity	5% to 95% (no condensation)
Dimensions (W x H x D)	35.8" x 20.4" x 1.88" (908.4 mm x 516.9 mm x 47.8 mm)
Weight	Gross weight: 24.25 lbs (11 kg), net weight: 18.74 lbs (8.5 kg)
Included Accessories	Power cord x 1, VGA cable x 1, HDMI x 1, Remote control x 1, battery x 2, user manual x 1, warranty card x 1

Interface

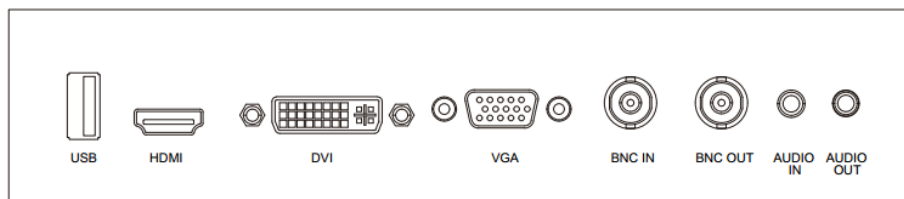

Accessories

