

## DS-D5055UL-B 55" LCD Display Monitor



Hikvision's DS-D5055UL-B 55-inch LCD monitor provides excellent color rendition and enhanced, 4K resolution. It features an LED direct-lit backlight with uniform brightness and no boundary shadow.

The DS-D5055UL-B is constructed of high-quality components and materials for 24/7 use.


**Available Models:**  
DS-D5055UL-B

- 4K Resolution (3840 x 2160)
- High Quality, flash-Free and Low-Radiation LCD
- True Color OSD and User-Friendly Operation Menu
- 3D Noise Reduction
- Programmable 12-Bit RGB Gamma Correction
- 2 HDMI Input Interfaces
- Spread Spectrum Technology Reduces EMI Radiation
- Mstar ACE-5 Auto Color and Image Enhancement
- Highly Reliable 24h/Day Functioning
- Industrial Panel
- VESA Standard Bracket

# Specifications

DS-D5055UL-B	
Diagonal Screen Size	55"
Backlight	LCD Backlight
Maximum Resolution	3840 x 2160
Brightness	500 cd/m <sup>2</sup>
Contrast	1100:1
Response Time	8 ms
Pixel Pitch	0.315 mm x 0.315 mm
Color	10 bit, 1.07 B
Viewable Area (H x V)	48.56" x 27.83" (1233.4 mm x 706.8 mm)
Viewing Angle	Horizontal 178°, vertical 178°
Interfaces	
VGA Input	1
HDMI Input	2
DVI Input	1
CVBS Input	1
CVBS Output	1
Audio Input	1
Audio Output	1
RS-232 Interface	1
Speaker	2, 8Ω, 5W
Network	1, RJ-45 10/100 Mbps self-adaptive Ethernet interface
General	
Power Supply	100 to 240 VAC, 50/60 Hz
Power Consumption	≤ 100 W, ≤ 1 W (standby)
Operating Temperature	0° F to 104° F (0° C to 40° C)
Operating Humidity	10% to 90% (no condensation)
Storage Temperature	-4° F to 140° F (-20° C to 60° C)
Storage Humidity	5% to 90% (no condensation)
Dimensions (W x H x D)	49.69" x 28.54" x 2.19" (1262.1 mm x 724.9 mm x 55.7 mm)
Weight	Gross weight: 90.4 lbs (41 kg), net weight: 77.2 lbs (35 kg)
Color of Casing	Black

# Interface

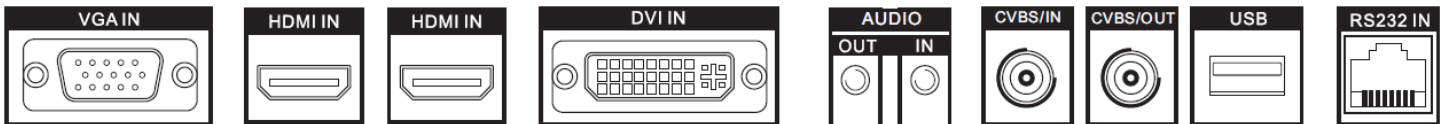

# Accessories

