


### DS-2CE16C2T-IR HD720p TurboHD Bullet Camera



#### Key Features

- HD720p Video Output
- HD-TVI Standard Technology
- True Day/Night
- DNR, Smart IR
- 65 Feet IR Range
- IP66 Weatherproof

#### Dimensions

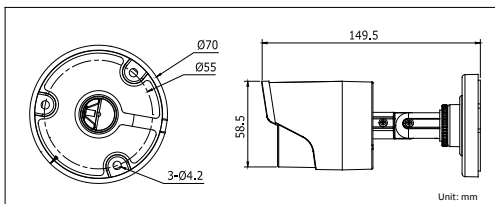

#### Accessories



Video Balun  
DS-1H18

#### Order Model

DS-2CE16C2T-IR

DS-2CE16C2T-IR	
Camera	
Image Sensor	1/3" progressive scan CMOS
HD-TVI Resolution	1280 x 720
Minimum Illumination	0.043 lux @ (f/2.5, AGC on), 0 lux with IR
Shutter Speed	1/30 sec. to 1/50,000 sec.
Lens	3.6 mm, f/2.5 (2.8 mm, 6 mm optional), angle of view: 76.88° (3.6 mm), 99.73° (2.8 mm), 50.1° (6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0° to 360°, tilt: 0° to 90°, rotation: 0° to 360°
Day/Night	IR cut filter
Synchronization	Internal synchronization
Video Frame Rate	30 fps @ 720p
HD Video Output	1 analog HD output
S/N Ratio	More than 62 dB
General	
Working Temperature/Humidity	-40° C to 60° C (-40° F to 140° F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Maximum 3.5 W
Ingress Protection	IP66
IR Range	Up to 65 feet IR range
Dimensions	Φ70 mm × 149.5 mm (Φ2.76" × 5.89")
Weight	360 g (0.79 lb.)