

DS-KD-DIS

Video Intercom Display Module



- 3.5" LCD Screen with 320 x 480 Resolution
- 4 Physical Buttons with Backlight
- Up to 500 Contacts Supported
- Dials Number and Calls Indoor Station with Keypad Module
- Unlocks Door with PIN Code Through Keypad Module
- Multiple Languages Supported
- IP65 Protection

The DS-KD-DIS Video Intercom Display Module is the newest addition to Hikvision's Modular IP Video Intercom Series.

It can be combined with Hikvision's Door Station, Name Tag, Card Reader or Keypad modules for customizable video intercom solutions. Up to three modules can be installed together using the surface or flush mount brackets, which must be purchased separately.

The display module features a 3.5" LCD screen with a 320 x 480 resolution, and can store up to 500 contacts.


Available Models:

DS-KD-DIS

Specifications


DS-KD-DIS	
System Parameters	
Processor	Embedded MCU processor
Storage	64 Mb
Flash	8 Mb
Display Parameters	
Screen	3.5" TFT LCD screen
Resolution	320 x 480
Backlight	Supported
Operation Method	Physical buttons
Interfaces	
Module Connections	2 (1 input, 1 output)
Power Input	12 VDC (from another module)
Power Output	12 VDC (from another module)
Physical Buttons	4 (up, down, OK, back)
Debugging Port	1
General	
Power Consumption	≤3 W
Working Temperature	-4° to 140° F (-20° to 140° C)
Working Humidity	10 to 95%
IP Protection Level	IP65
Installation	Flush and surface mounting
Dimensions	3.87" x 3.95" x 1.33" (98.5 mm x 100 mm x 34.2 mm)

Physical Interfaces

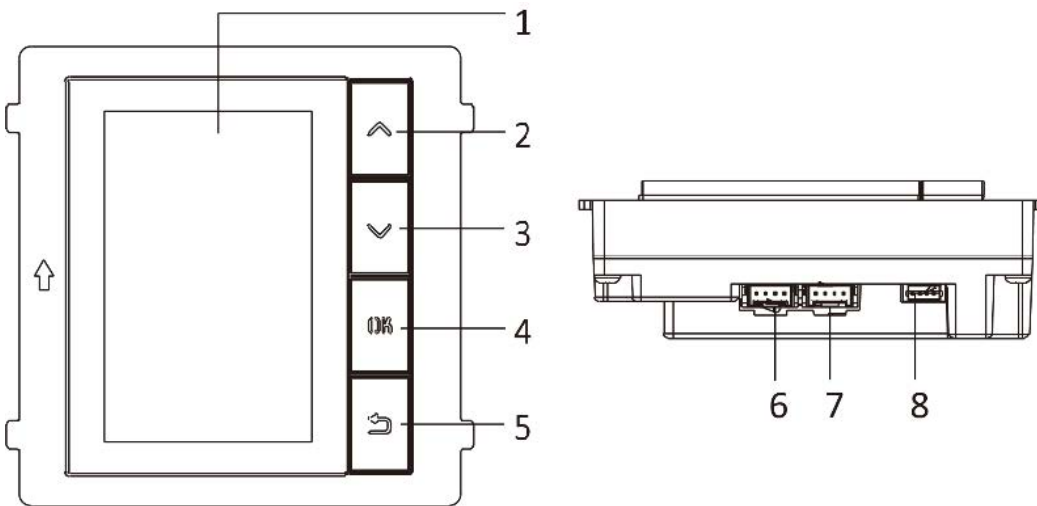




No.	Description	No.	Description
1	Screen	5	Back Button
2	Up Button	6	Module-Connecting Interface (Output)
3	Down Button	7	Module-Connecting Interface (Input)
4	OK Button	8	Debug Port

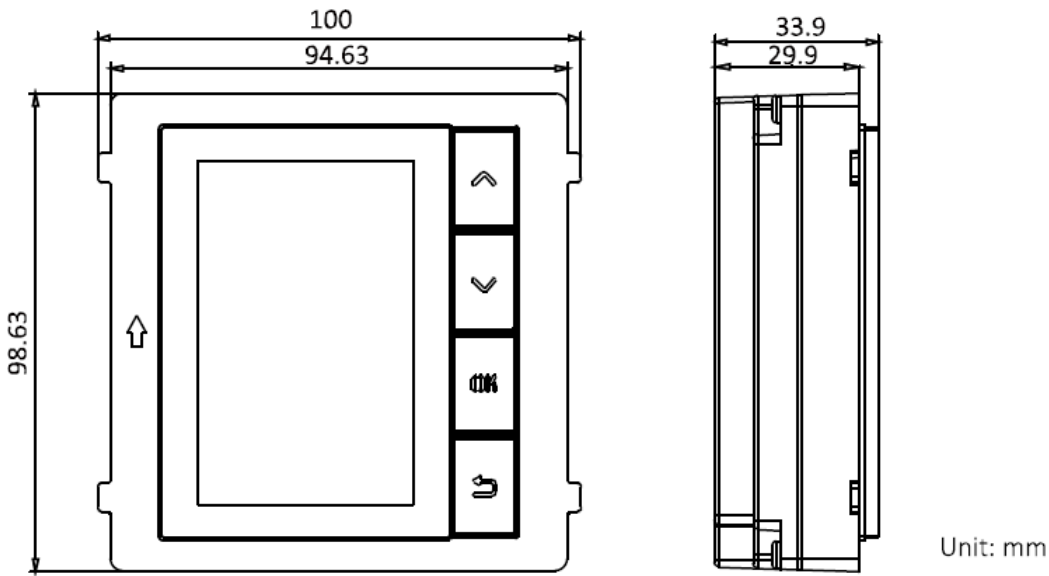Dimensions



Accessories (not included)

					
DS-KD-ACF1/Plastic Accessory Package	DS-KD-ACF2/Plastic Accessory Package	DS-KD-ACF3/Plastic Accessory Package	DS-KD-ACW1 Accessory Package	DS-KD-ACW2 Accessory Package	DS-KD-ACW3 Accessory Package