

## DS-D5032FL-C

### 32-Inch Public View Monitor (PVM)



- Backlit LED with full HD 1920 × 1080
- Wide View Angle: 178° (H)/178° (V)
- 3D Comb Filter, 3D De-Interlace, 3D Noise Reduction
- HDMI, VGA, and USB Signal Inputs
- Built-In Camera with IP Video Input
- Auto Input Signal Source Switch
- IR Remote Control
- Standby During No Signal Input
- Eco Power Saving Mode
- 24 VDC or 100 to 240 VAC
- Robust Components for 24/7 Usage
- VESA Stand Bracket

Hikvision's DS-D5032FL-C Public View Monitor (PVM) provides businesses with proven technology that deters thieves by displaying a visual reminder that a surveillance system is in use. A built-in high resolution, low light camera continuously displays live, local video on the large, bright screen.

H.265+/H.265/H.264 video captures video in a highly compressed format to save on bandwidth and storage costs. The unit also has an internal microSD card slot for up to 128 GB of local storage.


#### Available Models:

DS-D5032FL-C

# Specifications

MONITOR		DS-D5032FL-C
LCD Screen	Backlight	LED backlight
	Dimension	31.5 inch
	Dot Pitch	0.3637 mm × 0.3637 mm
	Maximum Resolution	1920 × 1080p
	Optimal Working Resolution	1920 × 1080 @ 60 Hz
	Brightness	400 cd/m <sup>2</sup>
	Contrast	3000: 1
	Response Time	6.5 ms
	Color	16.7 M
	Active Area	698.4 mm × 392.85 mm
Viewing Angle	Horizontal 178°, vertical 178°	
Interfaces	HDMI Input	1
	VGA Input	1
	LAN Interface	1
	USB 2.0 Interface	1
	Audio Input	1
	Audio Output	1
	IR Receiver	1 (for remote control)
General	Casing Material	Metal
	Casing Color	Black
	Wall-Mounting Hole	200 mm × 200 mm
	Wall-Mounting Screw	M6
	Power Supply	24 VDC; 100 to 240 VAC, 50/60 Hz
	Power Consumption	≤65 W
	Standby Power Consumption	≤0.5 W
	Working Temperature	0° to 40° C (0° to 104° F)
	Working Humidity	10 to 90%
	Storage Temperature	-20° to 60° C (-68° to 140° F)
	Storage Humidity	10 to 90%
	Dimensions (w/o Base)	737.4 mm × 508 mm × 74.9 mm (29" × 20" × 2.9")
	Packing Dimensions	888 mm × 210 mm × 680 mm (35.0" × 8.3" × 26.8")
Gross Weight	22 kg (48.5 lb)	
Net Weight	18 kg (39.7 lb)	
CAMERA		DS-2CD2125FWD-IM
Camera	Image Sensor	1/2.8" progressive scan CMOS
	Minimum Illumination	Color: 0.005 lux @ (f/1.2, AGC on), 0 lux with IR on
	Shutter Speed	1/3 s to 1/100,000 s
	Slow Shutter	Supported
	Lens	2.8 mm, horizontal field of view: 108°
	Lens Mount	M12
	Iris	f/1.6
	Day/Night	IR cut filter
	DNR	3D DNR
	Wide Dynamic Range	120dB
Compression Standard	Video Compression	Main stream: H.265/H.264 Sub stream: H.265/H.264/MJPEG Third stream: H.265/H.264
	H.264 Type	Main Profile/High Profile
	H.264+	Supported
	H.265 Type	Main Profile
	H.265+	Supported
Video Bit Rate	32 Kbps to 16 Mbps	
Image	Maximum Resolution	1920 × 1080
	Main Stream	30 fps (1920 × 1080, 1280 × 960, 1280 × 720)
	Sub Stream	30 fps (640 × 360, 352 × 240)
	Third Stream	30 fps (1920 × 1080)
	Image Enhancement	BLC/3D DNR
	Image Settings	Supports rotate mode. Brightness, contrast, saturation, and sharpness are adjustable via Web browser and client software
	ROI (Region of Interest)	Supports 1 fixed region for each stream, and face dynamic tracking
	Target Cropping	Supported
Day/Night Switch	Auto/scheduled	
Network	Alarm Trigger	Motion detection, tampering alarm, network disconnected, IP address conflict, illegal login, HDD full, HDD error
	Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6
	Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
	General Functions	Anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark, IP address filter
	On-Board Storage	Built-in microSD/SDHC/SDXC slot, up to 128 GB

# Interfaces

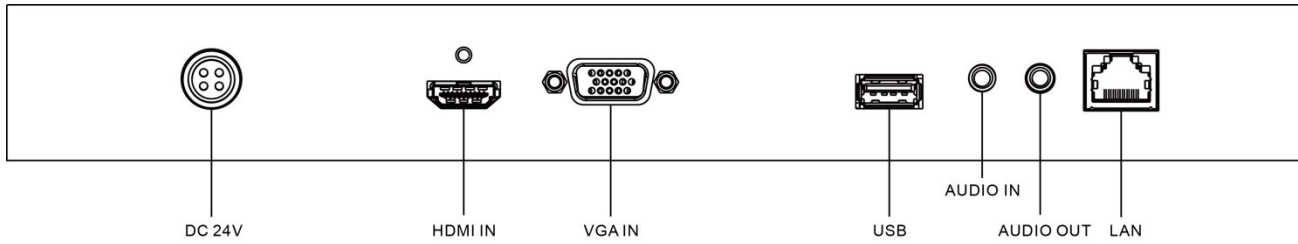

Interface	Description
24 VDC	24 VDC power input
HDMI IN	HDMI digital signal input
VGA IN	Analog VGA input
USB	USB interface
AUDIO IN	Audio input
AUDIO OUT	Audio output
LAN	RJ45 10M/100M bps self-adaptive Ethernet interface

# Dimensions (mm)

