

DS-2CD5565G0-IZHS

6 MP Outdoor Varifocal Network Dome Camera



- 1/1.8" (6 MP) Progressive Scan CMOS
- 3200 x 1800 Resolution @ 30 fps
- EXIR 2.0 with up to 100 ft (30 m) IR Range
- New Anti-IR Reflection Capsule
- 2.8 to 12 mm Motorized Lens
- H.265+, H.265, H.264+, H.264
- 5 Defined Streams and 5 Custom Streams
- 120dB WDR
- Alarm and Audio Input/Output
- MicroSD Card Slot Supports 256 GB
- Anti-Fog Coating on Inside of Lens Cover
- IP67, IK10 Protection
- 12 VDC and PoE (802.3af)

The Hikvision DS-2CD5565G0-IZHS Outdoor Varifocal Network Dome Camera provides high definition output. It supports H.265+ video compression, which assures savings in bandwidth and storage.

The camera is equipped with a 2.8 to 12 mm motorized varifocal lens, and offers an EXIR 2.0 IR range of up to 100 ft (30 m).



Smart features, such as line crossing, intrusion, scene change detection, and face detection are also supported.

Available models:
DS-2CD5565G0-IZHS


Specifications

DS-2CD56560-IZHS	
Camera	
Image Sensor	1/1.8" Progressive Scan CMOS
Minimum Illumination	Color: 0.009 Lux @ (f/1.2, AGC ON), 0 Lux with IR
Shutter Speed	1 s to 1/100,000 s
Slow Shutter	Yes
Day/Night	IR Cut Filter
Digital Noise Reduction	3D DNR
WDR	120 dB
Angle Adjustment	Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°
Lens	
Focal Length	2.8 to 12 mm
Aperture	f/1.2
Focus	Auto, semi-auto, manual
FOV	2.8 to 12 mm, horizontal FOV 112.4° to 41°, vertical FOV 58° to 23°, diagonal FOV 137° to 47°
Lens Mount	Integrated
IR	
IR Range	Up to 100 ft (30 m)
Wavelength	850 nm
Compression Standard	
Video Compression	Main stream: H.265+/H.265/H.264+/H.264; sub stream/third stream/fourth stream/fifth stream/custom stream: H.265+/H.265/H.264+/H.264/MJPEG
H.264 Type	Baseline profile/main profile/high profile
H.264+	Main stream
H.265 Type	Main profile
H.265+	Main stream
Video Bit Rate	32 Kbps to 16 Mbps
Audio Compression	G.711/G.722.1/G.726/MP2L2/PCM
Audio Bit Rate	64 Kbps (G.711)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/32 Kbps (PCM)
Smart Features	
Behavior Analysis	Line crossing detection, intrusion detection, region entrance detection, region exiting detection, unattended baggage detection, object removal detection
Exception Detection	Scene change detection, audio exception detection, defocus detection
Statistics	Counting
Face Detection	Yes
Region of Interest	Four fixed regions for main stream, sub stream, third stream, fourth stream, fifth stream, and dynamic face tracking
Image	
Maximum Resolution	3072 × 2048
Main Stream	30 fps (3200 × 1800, 3072 × 2048, 2560 × 1440, 1920 × 1080, 1080 × 720)
Sub Stream	30 fps (704 × 480, 640 × 480)
Third Stream	30 fps (1920 × 1080, 1280 × 720, 704 × 480, 640 × 480)
Fourth Stream	30 fps (1920 × 1080, 1280 × 720, 704 × 480, 640 × 480)
Fifth Stream	30 fps (704 × 480, 640 × 480)
Custom Stream	30 fps (1920 × 1080, 1280 × 720, 704 × 480, 640 × 480); up to five custom streams are supported
Image Enhancement	BLC, HLC, 3D DNR, Defog, EIS
Image Setting	Rotate mode, saturation, brightness, contrast, sharpness, AGC, and white balance are adjustable by client software or web browser
Target Cropping	Yes
SVC	H.264 and H.265 encoding
Day/Night Switching	Day/night/auto/schedule/triggered by alarm in
Picture Overlay	Logo picture can be overlaid on video with 128 x 128 24 bit bmp format
Network	
Network Storage	MicroSD/SDHC/SDXC card (256 GB), local storage and NAS (NFS,SMB/CIFS), ANR
Alarm Trigger	Motion detection, video tampering alarm, network disconnected, IP address conflict, illegal login, HDD full, HDD error
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour
Security Measures	Password protection, HTTPS encryption, IEEE 802.1x port-based network access control, IP address filtering, basic and digest authentication for HTTP/HTTPS, WSSE, and digest authentication for ONVIF
General Function	One-key reset, anti-flicker, 5 streams and up to 5 custom streams, heartbeat, password protection, privacy mask, watermark, and IP address filtering
API	ONVIF (PROFILE S, PROFILE G), ISAPI, SDK
Simultaneous Live View	Up to 20 channels
User/Host	Up to 32 users. 3 user levels: administrator, operator and user
Client	iVMS-4200, Hik-Connect, Hik-Central
Web Browser	IE8+, Mozilla Firefox 30.0+, Google Chrome 31.0+, Safari 8.0+
Interface	
Audio	1-ch 3.5 mm input (line in), 1-ch 3.5mm output, mono
Communication Interface	1-port RJ45 10M/100M/1000M Ethernet port
Alarm	1-ch input, 1-ch output (up to 24 VDC 1A or 110 VAC 500 mA)
Video Output	1 Vp-p composite output (75 Ω/CVBS)
Power Output	12 VDC, maximum of 200 mA (12 VDC, 24 VAC and PoE)
On-Board Storage	Built-in microSD/SDHC/SDXC slot, up to 256 GB
Reset Button	Yes
Audio	
Environment Noise Filtering	Yes
Audio Sampling Rate	8 kHz/16 kHz/32 kHz/44.1 kHz/48 kHz
General	
Operating Conditions	-22° F to 140° F (-30° C to 60° C); humidity 95% or less (non-condensing)
Power Supply	12 VDC ± 20%, two-core terminal block; PoE (802.3at, class 4): 42.5 V to 57 V
Power Consumption and Current	12 VDC ± 20%: 1.1 A, maximum 14 W, PoE (802.3at, class 3): 42.5 V to 57 V, 0.3 A to 0.4 A
Protection Level	IP67, IK10
Heater	Yes
Material	Aluminum alloy
Dimensions	Camera: Ø 6.4" × 5.5" (Ø 162 mm × 140.3 mm)
Weight	Camera: 4.30 lbs (1.95 kg)

Accessories (Not Included)

			
WML + PC155 Wall Mount Long + 155 mm Pendant Cap	CPM + PC155 Ceiling Pendant Mount + 155 mm Pendant Cap	PM Pole Mount	CM Corner Mount

Dimensions

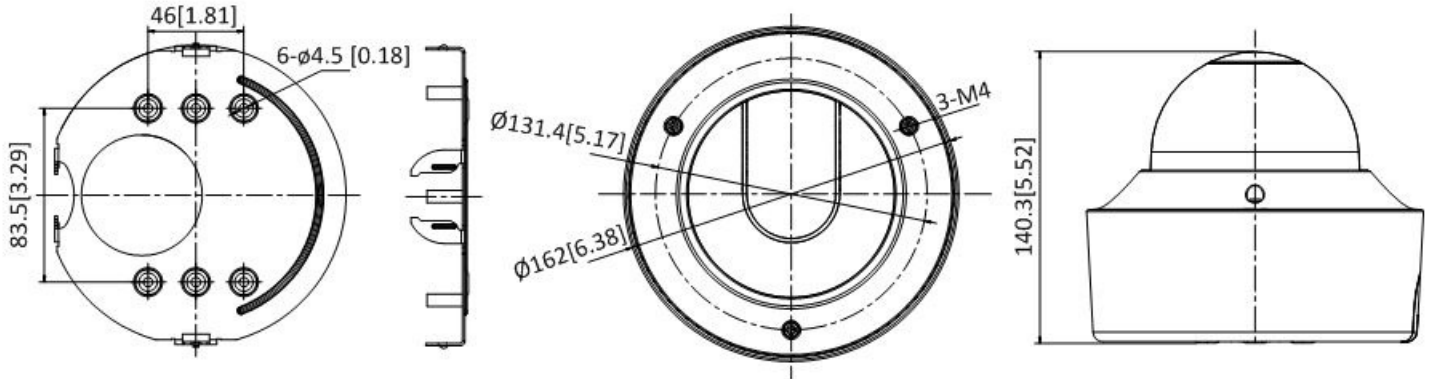

Unit: mm[inch]