

## DS-2CD5126G0-IZS

### 2 MP Indoor Varifocal Network Dome Camera



#### DarkFighter®

The Hikvision DS-2CD5126G0-IZS Indoor Varifocal Network Dome Camera provides high definition output. It supports H.265+ video compression, which assures savings in bandwidth and storage. Darkfighter technology allows for viewing and recording in ultra low-light conditions.

With a WDR of 140 dB and Lightfighter technology, it provides superb image quality.

The camera is equipped with a 2.8 to 12 mm motorized varifocal lens, and offers an EXIR 2.0 IR range of up to 100 ft (30 m).

Smart features, such as line crossing, intrusion, scene change detection, and face detection are also supported.

**Available models:**  
DS-2CD5126G0-IZS

#### LightFighter®









- 1/1.8" (2 MP) Progressive Scan CMOS
- 1920 x 1080 Resolution @ 60 fps
- EXIR 2.0 with up to 100 ft (30 m) IR Range
- 2.8 to 12 mm Motorized Lens
- Ultra-Low Light, 0.002 Lux (with f/1.2 Lens), Darkfighter Technology
- H.265+, H.265, H.264+, H.264
- 140dB WDR, Lightfighter Technology
- Alarm/Audio Input/Output
- 12 VDC Accessory Output
- MicroSD Card Slot Supports 256 GB
- IK10 Protection
- Dome has Anti-Reflective Coating
- 12 VDC and PoE (802.3af)




# Specifications

<b>DS-2CD512660-IZS</b>	
<b>Camera</b>	
Image Sensor	1/1.8" Progressive Scan CMOS
Minimum Illumination	Color: 0.002 lux @ (f/1.2, AGC on), 0 lux with IR
Shutter Speed	1 s to 1/100,000 s
Slow Shutter	Yes
Day/Night	IR Cut Filter
Digital Noise Reduction	3D DNR
WDR	140 dB
Angle Adjustment	Pan: 0° to 355°, tilt: 0° to 90°, rotate: 0° to 360°
<b>Lens</b>	
Focal Length	2.8 to 12 mm
Aperture	f/1.2
Focus	Auto, semi-auto, manual
FOV	2.8 to 12 mm, horizontal FOV 103.3° to 38.6°, vertical FOV 54.2° to 21.9°, diagonal FOV 124.2° to 44.3°
Lens Mount	Integrated
<b>IR</b>	
IR Range	Up to 100 ft (30 m)
Wavelength	850 nm
<b>Compression Standard</b>	
Video Compression	Main stream: H.265+/H.265/H.264+/H.264; sub stream/third stream/fourth stream/fifth stream/custom stream: H.265+/H.265/H.264+/H.264/MJPEG
H.264 Type	Baseline profile/main profile/high profile
H.264+	Main stream
H.265 Type	Main profile
H.265+	Main stream
Video Bit Rate	32 Kbps to 16 Mbps
Audio Compression	G.711/G.722.1/G.726/MP2L2/PCM
Audio Bit Rate	64 Kbps (G.711)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/32 Kbps (PCM)
<b>Smart Features</b>	
Behavior Analysis	Line crossing detection, intrusion detection, region entrance detection, region exiting detection, unattended baggage detection, object removal detection
Exception Detection	Scene change detection, defocus detection
Statistics	Counting
Face Detection	Yes
Region of Interest	Four fixed regions for main stream, sub stream, third stream, fourth stream, fifth stream, and dynamic face tracking
<b>Image</b>	
Maximum Resolution	1920 x 1080
Main Stream	60 fps (1920 x 1080, 1280 x 960, 1280 x 720)
Sub Stream	30 fps (704 x 480, 640 x 480)
Third Stream	30 fps (1920 x 1080, 1280 x 960, 1280 x 720, 704 x 480, 640 x 480)
Fourth Stream	30 fps (1920 x 1080, 1280 x 720, 704 x 480, 640 x 480)
Fifth Stream	30 fps (704 x 480, 640 x 480)
Custom Stream	30 fps (1920 x 1080, 1280 x 720, 704 x 480, 640 x 480); up to five custom streams are supported
Image Enhancement	BLC, HLC, 3D DNR, Defog, EIS
Image Setting	Rotate mode, saturation, brightness, contrast, sharpness, AGC, and white balance are adjustable by client software or web browser
Target Cropping	Yes
SVC	H.264 and H.265 encoding
Day/Night Switching	Day/night/auto/schedule/triggered by alarm in
Picture Overlay	Logo picture can be overlaid on video with 128 x 128 24 bit bmp format
<b>Network</b>	
Network Storage	MicroSD/SDHC/SDXC card (256 GB), local storage and NAS (NFS,SMB/CIFS), ANR
Alarm Trigger	Motion detection, video tampering alarm, network disconnected, IP address conflict, illegal login, HDD full, HDD error
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour
Security Measures	Password protection, HTTPS encryption, IEEE 802.1x port-based network access control, IP address filtering, basic and digest authentication for HTTP/HTTPS, WSSE, and digest authentication for ONVIF
General Function	One-key reset, anti-flicker, 5 streams and up to 5 custom streams, heartbeat, password protection, privacy mask, watermark, and IP address filtering
API	ONVIF (PROFILE S, PROFILE G), ISAPI, SDK
Simultaneous Live View	Up to 20 channels
User/Host	Up to 32 users. 3 user levels: administrator, operator and user
Client	iVMS-4200, Hik-Connect, Hik-Central
Web Browser	IE8+, Mozilla Firefox 30.0+, Google Chrome 31.0+, Safari 8.0+
<b>Interface</b>	
Audio	1-ch 3.5 mm input (line in), 1-ch 3.5mm output, mono
Communication Interface	1-port RJ45 10M/100M/1000M Ethernet port; 1 RS-485 interface (half duplex, HIKVISION, Pelco-P, Pelco-D, self-adaptive)
Alarm	1-ch input, 1-ch output (up to 24 VDC 1A or 110 VAC 500 mA)
Video Output	1 Vp-p composite output (75 Ω/CVBS), for adjustment only
Power Output	12 VDC, max. 200mA (supported by 12 VDC, 24 VAC and PoE)
On-Board Storage	Built-in microSD/SDHC/SDXC slot, up to 256 GB
Reset Button	Yes
<b>Audio</b>	
Environment Noise Filtering	No
Audio Sampling Rate	8 kHz/16 kHz/32 kHz/44.1 kHz/48 kHz
<b>General</b>	
Operating Conditions	-22° F to 140° F (-30° C to 60° C); humidity 95% or less (non-condensing)
Power Supply	12 VDC ± 20%, two-core terminal block; PoE (802.3at, class 4): 36 V to 57 V
Power Consumption and Current	12 VDC, 0.7 A, maximum 8 W; PoE (802.3at, 36 V to 57 V), 0.3 A to 0.2 A
Protection Level	IK10
Material	Aluminum alloy
Dimensions	Camera: Ø 5.5" x 4.8" (Ø 140.5 mm x 122.6 mm)
Weight	Camera: 1.98 lbs (0.9 kg)

## Accessories (Not Included)

							
<b>WML + PC130</b> Wall Mount Long + 130 mm Pendant Cap	<b>WML + PC130B</b> Wall Mount Long + 130 mm Pendant Cap (Black)	<b>CPM + PC130</b> Ceiling Pendant Mount + 130 mm Pendant Cap	<b>CPME</b> Extension Pipe	<b>PM</b> Pole Mount	<b>CM</b> Corner Mount	<b>RCM-1</b> Recessed Ceiling Mount	<b>AB135</b> Angled Base

## Dimensions

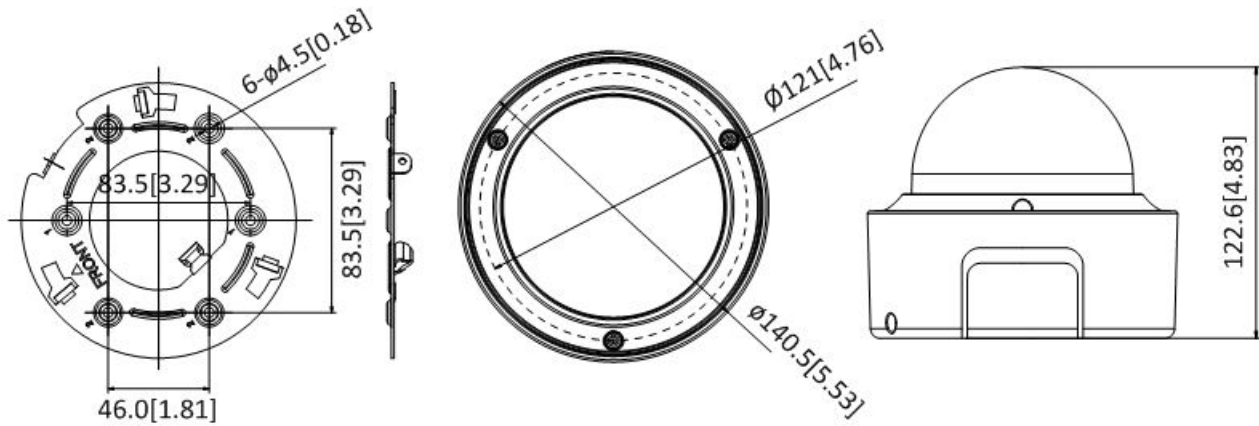

Unit: mm[inch]