

## DS-2CE56D1T-(A)VPIR3

### HD 1080p Vandal-Resistant Outdoor IR Dome Camera



- 1/2.7" (2 MP) High-Performance CMOS
- Analog HD Output, Up to 1080p Resolution
- 2.8 mm to 12 mm Varifocal Lens
- True Day/Night, Smart IR
- Up to 131 ft (40 m) IR Distance
- IP66 and IK10
- OSD Menu
- 24 VAC (-A)/12 VDC
- Up-the-Coax (HIKVISION-C Protocol)

Hikvision 2CE56D1T-(A)VPIR3 Vandal-Resistant Outdoor IR Dome Cameras are versatile solutions for all of your security needs. They feature a wide viewing angle that captures images with a resolution of 1080p at up to 30 fps. The Vandal-Resistant Camera supports the Hikvision-C Up-the-Coax protocol and is equipped with an IR lamp with a range of up to 131 ft (40 m), which facilitates nighttime recording.

It is an outdoor IP66 camera that supports a wide temperature range.

#### Available models:

DS-2CE56D1T- VPIR3


DS-2CE56D1T-(A)VPIR3



# Specifications

DS-2CE56D1T-(A)VPIR3	
<b>Camera</b>	
Image Sensor	1/2.7" (2 MP) CMOS image sensor
Signal System	PAL/NTSC
Effective Pixels	1984 (H) x 1105 (V)
Minimum Illumination	0.01 lux @ (f/1.2, AGC on), 0 lux with IR; 0.014 lux @ (f/1.4, AGC on), 0 lux with IR
Shutter Speed	1/25 (1/30) s to 1/50,000 s
Lens	2.8 to 12 mm @ f/1.4
	Angle of view: 105.2° to 32.8°
Lens Mount	Ø14
Day and Night	ICR
3-Axis Positioning	Pan: 0 to 355°, tilt: 0 to 75°, rotation: 0 to 355°
Synchronization	Internal synchronization
Video Frame Rate	1080p @ 30 fps (NTSC)
HD Video Output	1 analog HD-TVI output
S/N Ratio	>62 dB
<b>Menu</b>	
AGC	High/medium/low/off
D/N Mode	Smart IR/color/BW
White Balance	Auto/manual
BLC	Supported
Language	English
Functions	Digital noise reduction, mirror
<b>General</b>	
Operating Conditions	-40° to 140° F (-40° to 60° C), Humidity 90% or less (non-condensing)
Power Supply	24 VAC ±15%, 12 VDC ±15%, -A: 12 VDC ±15%
Power Consumption	Maximum 3 W, -A: maximum 4 W
Protection Level	IP66
IR Range	Up to 40 m
Impact Protection	IK10
Communication	Up-the-Coax Protocol: HIKVISION-C (HD-TVI output)
Dimensions	Ø145.2 × 124.1 mm (Ø5.72" × 4.9")
Weight	1.32 lbs (600 g)

# Dimensions

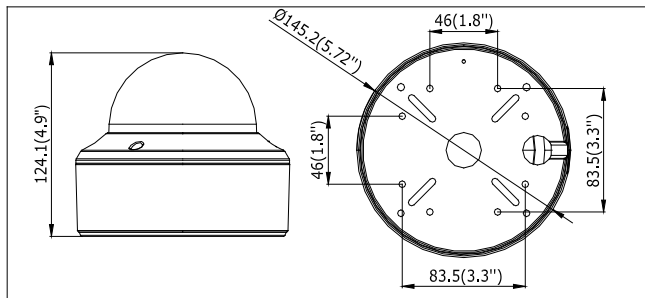

# Accessories

 <p><b>PM</b> Pole Mount</p>	 <p><b>WMS + PC135</b> Wall Mount</p>	 <p><b>WML + PC135</b> Wall Mount with Junction Box</p>	 <p><b>CPM + PC130</b> Pendant Mount</p>
 <p><b>RCM-3</b> In-Ceiling Mount</p>	 <p><b>CM</b> Corner Mount</p>	 <p><b>DS-1H18</b> Video Balun</p>	 <p><b>X41T</b> Camera Tester</p>