

DS-2CE56D5T-IT3

HD 1080P WDR EXIR Outdoor Turret Camera

- 1/3" (2 MP) High-Performance CMOS
- Analog HD Output, Up to 1080p Resolution
- True Day/Night
- OSD Menu, 3D DNR, Smart IR
- True WDR, Up to 120 dB
- EXIR technology, Up to 131 ft (40m) IR Distance
- IP66 Weatherproof
- Up-the-Coax (HIKVISION-C, Pelco-C Protocol)





Available models:
DS-2CE56D5T-IT3

Hikvision DS-2CE56D5T-IT3 WDR EXIR Turret Camera Cameras are a versatile solution for all of your security needs. They feature a wide range viewing angle that captures images with a resolution of 1080p at up to 30 fps. The EXIR Turret Camera supports the Hikvision-Up-the-Coax protocol, and is equipped with an IR lamp with a range of up to 131 ft (40 m), which facilitates nighttime recording.

It is an outdoor IP66 camera that supports a wide temperature range.

Dimensions

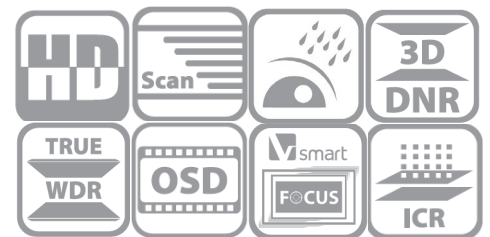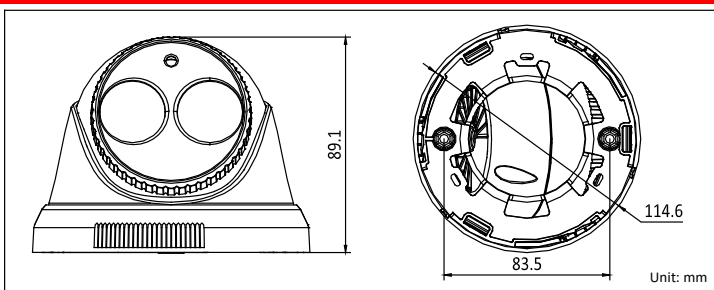

DS-2CE56D1T-(A)VFIIR

Camera

Image Sensor	1/3" (2 MP) CMOS Image Sensor
Signal System	PAL / NTSC
Effective Pixels	1944 (H) x 1092 (V)
Minimum Illumination	0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR; 0.014 Lux @ (F1.4, AGC ON), 0 Lux with IR
Shutter Time	1/25 (1/30) s to 1/50,000 s
Lens	3.6 mm (2.8 mm, 6 mm, 8 mm, 12 mm, 16 mm optional) Angle of View: 82.6° (3.6 mm), 103.5° (2.8 mm), 54.4° (6 mm), 38° (8 mm), 24.4° (12 mm), 18.9° (16 mm)
Lens Mount	M12
Day and Night	ICR
3-Axis Positioning	Pan: 0 to 360°, tilt: 0 to 75°, rotation: 0 to 360°
Synchronization	Internal synchronization
WDR	120 dB
Video Frame Rate	1080p @ 25 fps / 1080p @ 30 fps(PAL / NTSC)
HD Video Output	1 analog HD-TVI output
CVBS Output	1Vp-p Composite Output (75 Ω / BNC)
S/N Ratio	> 62 dB

Menu

Scene	Indoor, outdoor, indoor1, low-light
Camera ID	On / off (15 characters, position programmable)
AGC	Support
D/N Mode	Color / BW / EXT
White Balance	ATW, AWC-SET, Manual
Privacy Mask	On / off, maximum 8 zones
Motion Detection	On / off, maximum 4 zones
BLC	Support
Anti-flicker	On / off
Language	English, Japanese, CHN1, CHN2, Korean, German, French, Italian, Spanish, Polish, Russian, Portuguese, Dutch, Turkish, Hebrew and Arabic
Functions	HSBLC, digital noise reduction, digital zoom (62x), slow shutter, mirror, defog, defect pixel correction, Smart D-Zoom

General

Operating Conditions	-22° F to 140° F (-30° C to 60° C), Humidity 90% or less (non-condensing)
Power Supply	12 VDC ± 15%
Power Consumption	Maximum 5 W
IR Range	Up to 131 ft (40 m)
Communication	Up-the-Coax, Protocol: Pelco-C (CVBS output), Hikvision-C (HD-TVI output)
Dimensions	Φ 4.5" × 3.5" (Φ114.6 × 89.1 mm)
Weight	450 g

 <p>PM Pole mount</p>	 <p>WMS + PC110 Wall mount</p>	 <p>WM110 Wall mount</p>	 <p>CPM Pendant mount</p>
 <p>ABS Angled base</p>	 <p>CBS Conduit base</p>	 <p>DS-1H18 Video balun</p>	 <p>X41T Camera tester</p>