

### DS-7332HGHI-SH TurboHD DVR




#### Key Features

- Dual Stream H.264 Compression
- HD-TVI/Analog/Network Camera Tribrid
- Auto-Detect/Configure HD-TVI/Analog Input
- Full Channel @ 1080p Resolution Non Real-Time Recording
- HDMI and VGA Output at Up to 1920 x 1080p Resolution
- High Resolution Over Coax Cable
- Supports Up to 16-ch Synchronous Playback at 1080p Resolution

#### Rear Panel

1. Video In
2. Not Used
3. Audio In RCA Connectors
4. USB Port
5. HDMI
6. VGA Interface
7. VGA Audio Out
8. LAN Network Interface
9. RS-485 Serial Interface, Keyboard Interface, Alarm In
10. 100 to 240 VAC Power Input
11. Power Switch
12. GND
13. Line In
14. eSATA Interface
15. RS-232 Serial Port

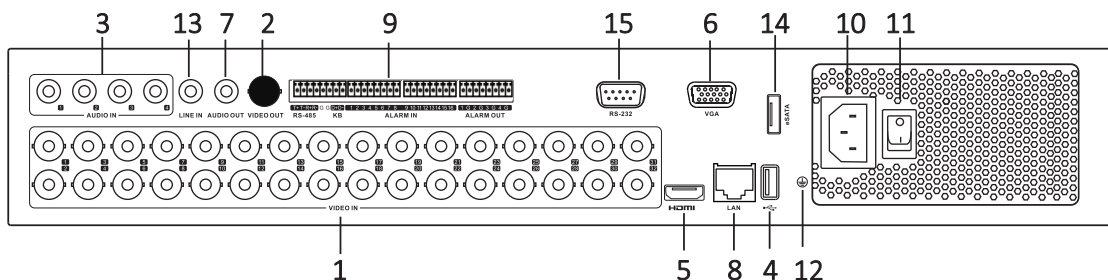

DS-7332HGHI-SH	
<b>Video/Audio Input</b>	
Video Compression	H.264
Analog and HD-TVI Video Input	32-ch BNC interface (1.0 Vp-p, 75 Ω)
Supported Camera Types	720p25, 720p30, 720p50, 720p60, CVBS
IP Video Input	8-ch (up to 32-ch) Up to 2 MP resolution
<b>Audio/Audio Output</b>	
Audio Compression	G711u
Audio Input	4-ch, RCS (2.0 Vp-p, 1 K Ω)
Two-Way Audio In	1-ch, RCA (2.0 Vp-p, 1 K Ω)
<b>Video/Audio Output</b>	
HDMI/VGA Output	1920 x 1080/60 Hz, 1280 x 1024/60 Hz, 1280 x 720/60 Hz, 1024 x 768/60 Hz
Encoding Resolution	Main stream: 1080p (non-real-time)/720p/VGA/4CIF/CIF Sub-stream: WD1 (non-real-time)/4CIF (non-real-time)/CIF/QCIF/QVGA
Frame Rate	Main stream: 30 fps (maximum) Sub-stream: 30 fps (maximum)
Video Bit Rate	32 Kbps to 8 Mbps
Audio Output	2-ch, RCA (linear, 1 K Ω, for VGA output and CVBS output respectively)
Audio Bit Rate	64 Kbps
Dual-Stream	Supported
Stream Type	Video, video and audio
Synchronous Playback	16-ch
Playback Resolution	1080p/720p/VGA/WD1/4CIF/CIF/QVGA/QCIF
<b>Network Management</b>	
Remote Connections	128
Network Protocols	TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTPS
<b>Hard Disk</b>	
Type	4 SATA interfaces for 4 HDDs; 1 eSATA interface
Capacity	Up to 6 TB capacity for each disk
<b>External Interface</b>	
Network Interface	1; 10M/100M/1000M self-adaptive Ethernet interface
Serial Interface	RS-232, RS-485, keyboard
Alarm In/Out	16/4
USB Port	3 x USB 2.0
<b>General</b>	
Power Supply	100 to 240 VAC, 47 to 63 Hz
Consumption (w/o hard disks)	≤ 65 W
Working Temperature	-10° C to +55° C (14° F to 131° F)
Working Humidity	10% to 90%
Chassis	19-inch rack-mounted 1.5U chassis
Dimensions (w x d x h)	445 mm x 390 mm x 70 mm (17.5" x 15.3" x 2.7")
Weight (w/o hard disks)	≤ 5 Kg (11.0 lb)

#### Order Model

DS-7332HGHI-SH