

DS-2CE16H5T-ITE

5 MP Outdoor Ultra-Low Light PoC Bullet Camera



- 5 MP High Performance CMOS
- Up to 2560 x 1944 Resolution
- Ultra-Low Light
- 2.8 mm, 3.6 mm, or 6 mm Fixed Lens
- OSD Menu, DNR, DWDR
- EXIR 2.0 with up to 65 ft (20 m) IR Range
- PoC.af
- Up-the-Coax (HIKVISION-C)
- IP67 Protection

The Hikvision DS-2CE16H5T-ITE 5 MP Outdoor Ultra-Low Light Power-over-Coax (PoC) Bullet Camera provides high definition analog output. TurboHD means that the analog signal can be sent over existing coaxial cable, eliminating the need to run new cables for high definition video.

EXIR is Hikvision's proprietary IR extended range technology, which has a range of 65 feet (20 meters).

The 2.8 mm, 3.6 mm, or 6 mm lens is optimized for viewing angles that fit any situation. DWDR (Digital Wide Dynamic Range) ensures that ideal images are captured regardless of the lighting conditions.






Available models:
DS-2CE16H5T-ITE



Specifications

DS-2CE16H5T-ITE	
Camera	
Image Sensor	5 MP CMOS image sensor
Resolution	2560 (H) x 1944 (V)
Minimum Illumination	Color: 0.008 lux @ (f/1.2, AGC on), 0 lux with IR
Shutter Speed	1/30 s to 1/50,000s
Lens	2.8 mm, 3.6 mm, or 6 mm fixed lens
Horizontal Field of View	91° (2.8 mm), 70° (3.6 mm), or 45° (6 mm)
Lens Mount	M12
Day/Night	IR cut filter
Angle Adjustment	Pan: 0° to 360°; tilt: 0° to 180°; rotate: 0° to 360°
Synchronization	Internal synchronization
Frame Rate	2560 x 1944 @ 20 fps, 2560 x 1944 @ 12.5 fps; 2560 x 1440 @ 30 fps, 2560 x 1440 @ 25 fps (default); 1920 x 1080 @ 30 fps, 1920 x 1080 @ 25 fps *2560 x 1944 @ 12.5 fps is not available in PoC mode.
Menu	
AGC	Supported
D/N Mode	Auto/Color/BW (Black and White)
White Balance	ATW/MWB
BLC	Supported
DWDR (Digital Wide Dynamic Range)	Supported
Language	English
Functions	Brightness, sharpness, DNR, mirror, Smart IR
Interface	
Video Output	1 HD analog output
General	
Operating Conditions	-40° to 140° F (-40° to 60° C), humidity: 90% or less (non-condensing)
Power Supply	12 VDC ±25%/PoC.af
Power Consumption	Maximum 4.5 W
Ingress Protection	IP67
Material	Metal
IR Range	Up to 65 ft (20 m)
Communication	Up-the-Coax, protocol: HIKVISION-C (TVI output)
Dimensions	2.28" x 2.40" x 6.42" (58 mm x 61 mm x 163 mm)
Weight	Approximately 0.77 lbs (350 g)


Accessories¹

NOT INCLUDED				
				
PM Pole Mount	CM Corner Mount	ABS Angled Base	CBXS Conduit Base	DS-1H18 Video Balun

Box Contents (Subject To Change w/o Notice)

BNC Connector
 Drill Template
 Quick Start Guide
 Power Pigtail with Screw Terminals
 Power Pigtail with Power Leads
 Screws

Dimensions

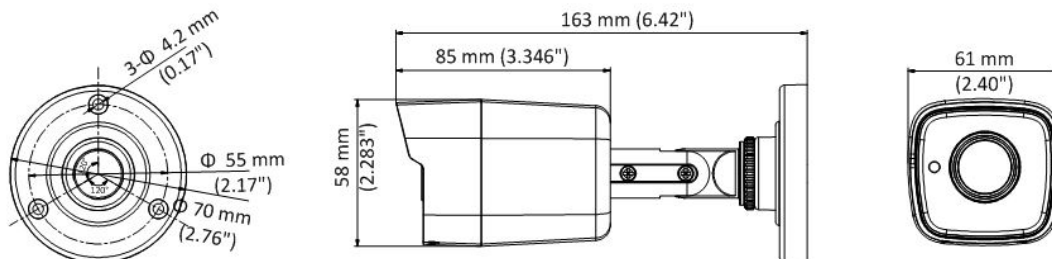

¹ Additional accessories not shown may fit without, or in combination with, these accessories. See your sales representative for information about your needs.