

## DS-K1T105M/M-C

### Standalone Access Control Terminal

- Doorbell Ringtone Settings Function
- 2.8-inch LCD Screen
- Supports TCP/IP, Wi-Fi, and EHome Protocols
- Face Detection and Picture Capture Camera, 2 MP Optional (DS-K1T105M-C Only)
- Multiple Door Opening Modes (Card, Card + Password, Exit Button, etc.)

Hikvision's DS-K1T105M/M-C is a standalone access control terminal with picture capturing function. The DS-K1T105M/M-C is designed with a 2.8-inch color LCD screen, and HD camera (2 MP optional). It supports two network communication methods (TCP/IP and Wi-Fi) and supports offline operation.

Mounting is via a standard U.S. single gang box.

**Available Models:** DS-K1T105M: M1 Card  
DS-K1T105M-C (w/Camera): M1 Card



DS-K1T105M-C




DS-K1T105M

# Specifications

	DS-K1T105M	DS-K1T105M-C
Processor	□ 1 GHz, 32-bit high-performance processor	
Storage	256 MB storage	
MicroSD Card (Additional)	Maximum 32 GB, built-in microSD card slot	
Operating System	Linux	
Camera	2 MP (optional)	
Valid Card/Swiping Record	100,000/300,000	
Card Read Mode	Mifare card reading	
Card Read Frequency	13.56 MHz	
External Card Reader	RS-485 IC reader	
Communication Mode	TCP/IP, Wi-Fi, RS-485, and Wigan 26/34 (under card reader mode only)	
Transmission Rate	TCP/IP, Wi-Fi: 10/100 Mbps self-adaptive, RS-485: 19200 bps-N-8-1	
Input Interface	Door magnetic sensor x 1, alarm input x 2, tamper-resistant switch x 1, exit button x 1	
Output Interface	Doorbell x 1, relay x 1	
LCD Screen	320 x 240 LCD-TFT display screen	
Keyboard	17 keys (0 to 9, F1, F2, DEL, switch key, *, #, doorbell)	
LED Indicator	Power/communication	
Audio	Loudspeaker	
Power Supply	12 VDC	
Working Current	500 mA (without locks)	
Working Temperature	-4° to 149° F (-20° to 65° C)	
Working Humidity	10% to 90% (non-condensing)	
Certificates	CE, FCC, UL 60950-1	
Dimensions	4.8" x 3.2" x 0.9" (122 mm x 82 mm x 23 mm)	
Weight	9.88 lb (280 g)	

# Dimensions

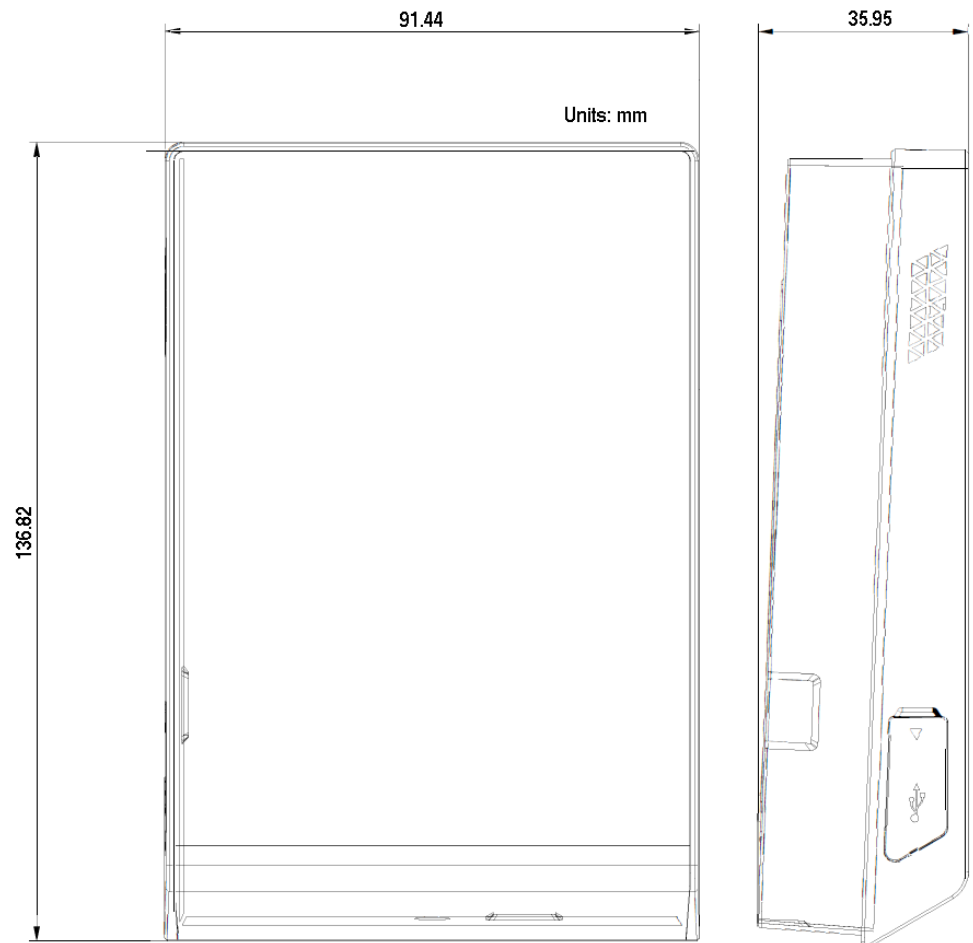

Mounting: Standard U.S. single gang box