

DS-7104NI-SL/W


Embedded Mini WiFi NVR



Key Features

- Up to 5 Megapixel Resolution Recording
- HDMI and VGA Output at Up to 1920 × 1080p Resolution
- HDD Quota and Group Management
- Built-In WiFi Module To Support Wireless
- Auto Detect and Connect Hikvision IP Cameras

Rear Panel of DS-7104NI-SL/W

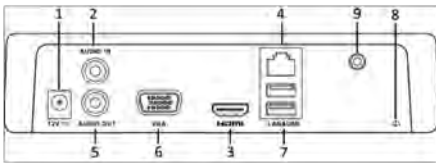

1. Power Supply
2. Audio In
3. HDMI Interface
4. LAN Network Interface
5. Audio Out
6. VGA Interface
7. USB Interface
8. Ground
9. Antenna Interface

Order Model

DS-7104NI-SL/W

DS-7104NI-SL/W	
Video/Audio Input	
Video Input	4-ch
Two-Way Audio Input	1-ch, RCA (2.0 Vp-p, 1 k Ω)
Network	
Incoming Bandwidth	25 Mbps
Outgoing Bandwidth	40 Mbps
Remote Connection	128
Video/Audio Output	
Recording Resolution	5 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
HDMI/VGA Output	1-ch, resolution: 1920 × 1080p/60 Hz, 1600 × 1200/60Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60Hz
Audio Output	1-ch, RCA (linear, 1 k Ω)
Playback Resolution	5 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous Playback	4-ch @ 720p, 2-ch @ 1080p, 1-ch @ 5 MP
Hard Disk	
SATA	1 SATA interface for 1 HDD
Capacity	Up to 6 TB for each disk
External Interface	
Network Interface	1 RJ-45 10/100 Mbps self-adaptive Ethernet interface
Antenna Interface	1, with wireless AP function
Wireless	IEEE 802.11 a/b/g/n, 2.4 GHz
USB Interface	2 × USB 2.0
Others	
Power	12 VDC
Consumption	≤ 15 W (without hard disk)
Working Temperature	-10° C to +55° C (+14° F to +131° F)
Working Humidity	10% to 90%
Chassis	1U chassis
Dimensions (W × D × H)	200 mm × 200 mm × 45 mm (7.87" x 7.87" x 1.77")
Weight	≤ 1 kg (2.2 lbs) (without hard disk)