



Key Feature

- 2-wire IP distributor
- 6 × 2-wire cascade interfaces with device power supply
- 2 cascade interfaces for DS-KAD706Y/ DS-KAD706Y-S
- 8 interface indicators, 1 RJ-45 Interface, 1 Reset button
- Din rail mounting, 24VDC


Specification

Device interfaces	
Network interface	1 RJ45
Two-wire interface	8(2 for cascading, 6 for devices)
Signal indicator	8
Power indicator	1
Reset	1
General	
Power supply	24 VDC
Power consumption	CH1 to CH5 < 6 W, CH6 < 16 W
Working temperature	-10 ° C to 55 ° C (14 ° F to 131 ° F)
Working humidity	10% to 90%

Available Model

DS-KAD706Y-P

Dimension

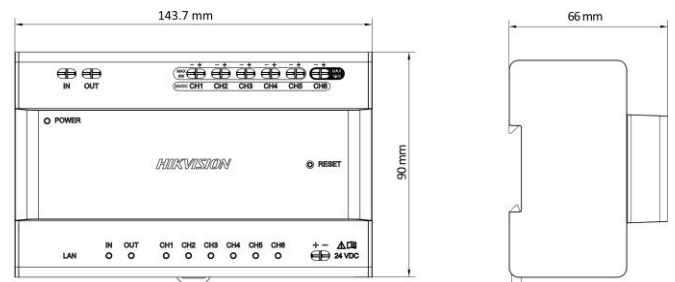

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

